


Electrical Data			TAC-9CSD/KC	TAC-12CSD/KC
Power supply			220-240V~/ 50Hz/1P	220-240V~/ 50Hz/1P
Voltage range		V	198~253	198~253
Rated current		А	4.8	10 4.8
Rated input		W	880 2100)	2250 (1100)
Max current		А	6.3	7.9
Max input		W	1140	1410
Refrigerating System				
Refrigerant/Charge		Gram	R32/330g	R32/330g
Compressor		Type Model MFG	Rotary 44X183NF7F#MZ RECHI	Rotary GSG125UY-A6DT HIGHLY
Fan System				
Indoor air circulation Cooling/heating		m3/h	600	650
Indoor fan type			Cross flow	Cross flow
Outdoor fan type			Propeller	Propeller
Connections				
Connecting Pipe	Gas Liquid	Inches Inches	3/8" 1/4"	3/8" 1/4"
Connecting Wiring	Size x Core no.	mm²	1.0x3	1.0x3
Others				
Suitable area		m2	9~16	15-23
"Net dimensions (W x H x D)"	Indoor Outdoor	mm mm	777×250×201 722 × 276 × 459	777×250×201 787×290×498
Net weight	Indoor Outdoor	kg kg	8 21.5	8 25
"Packing dimensions (W x H x D)"	Indoor Outdoor	mm mm	840×315×260 765×310×481	840×315×260 818×325×515
Gross weight	Indoor Outdoor	kg kg	10 24	10 28
Loading Capacity (w/o pipe)	40' HQ		157	157

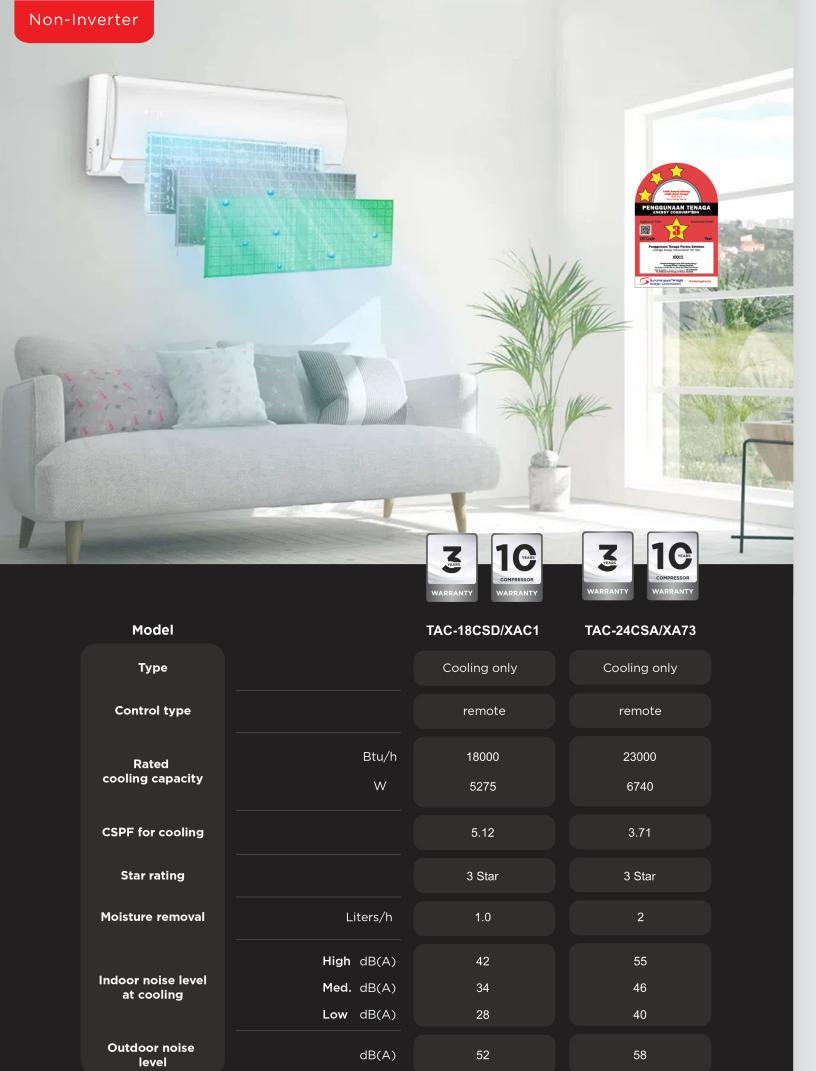

Electrical Data			TAC-18CSD/XAC1	TAC-24CSA/XA73
Power supply			220-240V~/ 50Hz/1P	220-240V~/ 50Hz/1P
Voltage range		V	198~264	198~265
Rated current		А	3.8	7.5
Rated input		W	810 2100)	2250 (1700)
Max current		А	7.5	10.5
Max input		W	1800	2800
Refrigerating System				
Refrigerant/Charge		Gram	R32/310g	R410A/1000g
		Type	Rotary/	Rotary
Compressor		Model	Highly	ASG225V1SKP
		MFG	RECHI	GMCC
Fan System				
Indoor air circulation Cooling/heating		m3/h	850	1150
Indoor fan type			Cross flow	Cross flow
Outdoor fan type			Propeller	Propeller
Connections				
Connecting Pipe	Gas	Inches	3/8"	5/8"
	Liquid	Inches	1/4"	1/4"
Connecting Wiring	Size x Core no.	mm²	1.5x3	1.5x3
Others				
Suitable area		m2	18~26	25~40
"Net dimensions (W x H x D)"	Indoor	mm	777×250×201	1010×315×220
	Outdoor	mm	712×276×459	920×380×699
Net weight	Indoor	kg	12	12
	Outdoor	kg	38	46
"Packing dimensions (W x H x D)"	Indoor	mm	850×320×275	1096×390×297
	Outdoor	mm	765×310×481	950×420×732
Gross weight	Indoor	kg	10	15
	Outdoor	kg	25	51
Loading Capacity (w/o pipe)	40' HQ		168	157